




CLIP SPECIFICATIONS

Diameter: 1/8" - 1 1/16"
Bolt Size: #10 - 3/8"
Notes: Used to hold pipe, conduit, tubing or wires against a solid surface.

Material Code: A - SAE 1008/1010 G90 Per ASTM A653/653M Galvanized Steel
 B - SAE 1008/1010 Low Carbon Steel Zinc Plate per ASTM B633 Fe/Zn 8 Type II
 C - SAE 301/304 Stainless Steel

PART NUMBER CALL OUT

F403-008 A Half Clip Plain, Galv, 1/2" Dia, 5/16" Bolt
 Material Code
 Base Part Number

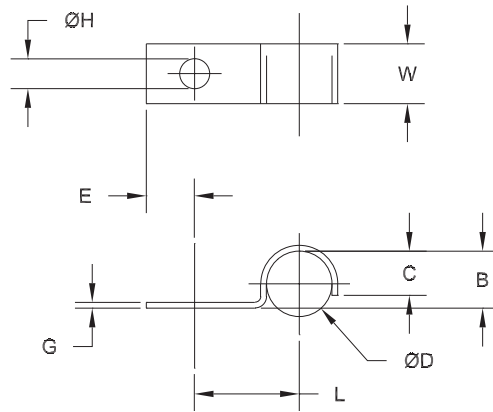

Base Part Number	D	H	L	W	E	B	G	C
	Clamping Diameter	Hole Diameter	Center to Center	Width	Hole Center to End	Gap	Material Thickness	Closure
	± .015	± .005	± .031	± .010	± .015	± .015	± .002	± .015
F401-002	0.125	0.218	0.437	0.500	0.250	0.125	0.032	0.093
F402-002	0.125	0.281	0.437	0.500	0.250	0.125	0.032	0.093
F401-003	0.187	0.218	0.437	0.500	0.250	0.156	0.032	0.093
F402-003	0.187	0.281	0.437	0.500	0.250	0.156	0.032	0.093
F401-004	0.250	0.218	0.437	0.500	0.250	0.188	0.032	0.156
F402-004	0.250	0.281	0.437	0.500	0.250	0.188	0.032	0.156
F401-005	0.312	0.218	0.500	0.500	0.250	0.250	0.048	0.188
F402-005	0.312	0.281	0.500	0.500	0.250	0.250	0.048	0.188
F403-005	0.312	0.343	0.500	0.625	0.250	0.250	0.048	0.188
F401-006	0.375	0.218	0.531	0.625	0.312	0.312	0.048	0.218
F402-006	0.375	0.281	0.531	0.625	0.312	0.312	0.048	0.218
F403-006	0.375	0.343	0.687	0.625	0.343	0.312	0.060	0.218
F404-006	0.375	0.406	0.687	0.750	0.343	0.312	0.060	0.218
F401-007	0.437	0.218	0.562	0.625	0.312	0.375	0.048	0.281
F402-007	0.437	0.281	0.562	0.625	0.312	0.375	0.048	0.281
F403-007	0.437	0.343	0.687	0.625	0.375	0.375	0.060	0.281
F404-007	0.437	0.406	0.687	0.750	0.375	0.375	0.060	0.281
F401-008	0.500	0.218	0.625	0.625	0.312	0.437	0.060	0.312
F402-008	0.500	0.281	0.625	0.625	0.312	0.437	0.060	0.312
F403-008	0.500	0.343	0.687	0.625	0.375	0.437	0.060	0.312
F404-008	0.500	0.406	0.687	0.750	0.375	0.437	0.060	0.312
F401-009	0.562	0.218	0.687	0.625	0.312	0.500	0.060	0.343
F402-009	0.562	0.281	0.687	0.625	0.312	0.500	0.060	0.343
F403-009	0.562	0.343	0.750	0.625	0.375	0.500	0.060	0.343
F404-009	0.562	0.406	0.750	0.750	0.375	0.500	0.060	0.343
F401-010	0.625	0.218	0.750	0.625	0.312	0.562	0.060	0.437
F402-010	0.625	0.281	0.750	0.625	0.312	0.562	0.060	0.437
F403-010	0.625	0.343	0.812	0.625	0.375	0.562	0.060	0.437
F404-010	0.625	0.406	0.812	0.750	0.375	0.562	0.060	0.437




CLIP SPECIFICATIONS

Diameter: 1/8" - 1 1/16"
Bolt Size: #10 - 3/8"
Notes: Used to hold pipe, conduit, tubing or wires against a solid surface.

Material Code: A - SAE 1008/1010 G90 Per ASTM A653/653M Galvanized Steel
 B - SAE 1008/1010 Low Carbon Steel Zinc Plate per ASTM B633 Fe/Zn 8 Type II
 C - SAE 301/304 Stainless Steel

PART NUMBER CALL OUT

F403-008 A Half Clip Plain, Galv, 1/2" Dia, 5/16" Bolt
 A — Material Code
 F403-008 — Base Part Number

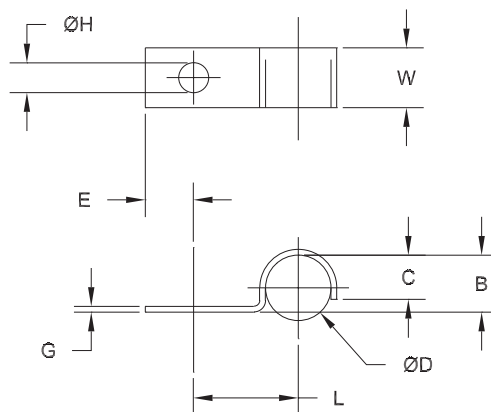

Base Part Number	D	H	L	W	E	B	G	C
	Clamping Diameter	Hole Diameter	Center to Center	Width	Hole Center to End	Gap	Material Thickness	Closure
	± .015	± .005	± .031	± .010	± .015	± .015	± .002	± .015
F401-011	0.687	0.218	0.812	0.625	0.312	0.625	0.060	0.406
F402-011	0.687	0.281	0.812	0.625	0.312	0.625	0.060	0.406
F403-011	0.687	0.343	0.875	0.625	0.375	0.625	0.060	0.406
F404-011	0.687	0.406	0.875	0.750	0.375	0.625	0.060	0.406
F401-012	0.750	0.218	0.812	0.625	0.312	0.687	0.060	0.437
F402-012	0.750	0.281	0.812	0.625	0.312	0.687	0.060	0.437
F403-012	0.750	0.343	0.875	0.625	0.375	0.687	0.060	0.437
F404-012	0.750	0.406	0.875	0.750	0.375	0.687	0.060	0.437
F401-013	0.812	0.218	0.875	0.625	0.312	0.750	0.060	0.468
F402-013	0.812	0.281	0.875	0.625	0.312	0.750	0.060	0.468
F403-013	0.812	0.343	0.937	0.625	0.375	0.750	0.060	0.468
F404-013	0.812	0.406	0.937	0.750	0.375	0.750	0.060	0.468
F402-014	0.875	0.281	0.937	0.750	0.375	0.812	0.060	0.531
F403-014	0.875	0.343	0.937	0.750	0.375	0.812	0.060	0.531
F404-014	0.875	0.406	0.937	0.750	0.375	0.812	0.060	0.531
F402-015	0.937	0.281	0.968	0.750	0.437	0.812	0.060	0.593
F403-015	0.937	0.343	0.968	0.750	0.437	0.812	0.060	0.593
F404-015	0.937	0.406	0.968	0.750	0.437	0.812	0.060	0.593
F402-016	1.000	0.281	1.000	0.750	0.437	0.937	0.060	0.625
F403-016	1.000	0.343	1.000	0.750	0.437	0.937	0.060	0.625
F404-016	1.000	0.406	1.000	0.750	0.437	0.937	0.060	0.625
F402-017	1.062	0.281	1.062	0.750	0.437	1.000	0.060	0.687
F403-017	1.062	0.343	1.062	0.750	0.437	1.000	0.060	0.687
F404-017	1.062	0.406	1.062	0.750	0.437	1.000	0.060	0.687

Warranty Disclaimer

The parts described herein are manufactured as set forth in the specifications listed for each part. Although we have taken reasonable efforts to include accurate and up to date information in this catalog, we make no warranty or representations as to its accuracy. We assume no liability or responsibility for any errors or omissions in the content of the catalog.

Every part listed in the catalog is provided to you "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

THIS DISCLAIMER OF LIABILITY APPLIES TO ANY DAMAGES OR INJURY CAUSED BY ANY FAILURE OF PERFORMANCE, ERROR, OMISSION, INTERRUPTION, DELETION, DELAY IN OPERATION OR TRANSMISSION, COMMUNICATION LINE FAILURE, THEFT OR DESTRUCTION OR UNAUTHORIZED ACCESS TO, ALTERATION OF, OR USE OF RECORD, WHETHER FOR BREACH OF CONTRACT, TORTIOUS BEHAVIOR, NEGLIGENCE, OR UNDER ANY OTHER CAUSE OF ACTION. YOU ALSO SPECIFICALLY ACKNOWLEDGE AND AGREE THAT WE ARE NOT LIABLE FOR THE DEFAMATORY, OFFENSIVE OR ILLEGAL CONDUCT OF OTHER PERSONS AND THAT THE RISK OF INJURY FROM THE FOREGOING RESTS ENTIRELY WITH YOU.



**FRANKLIN
FASTENER**
Est. 1953

12701 Beech Daly Road
Redford, MI 48239-2456
U.S.A.

Phone: (313) 537-8900
Fax: (313) 537-0286
www.franklinfastener.com

© 2009 Franklin Fastener, Inc.
All Rights Reserved.
Produced in U.S.A.