




CLIP SPECIFICATIONS

Diameter: 3/16" - 1"
Bolt Size: #10 - 3/8"
Coating: Black Vinyl Plastisol Coating Per SAE J200
 0.032" Thick ± .015"
Notes: Used to hold pipe, conduit, tubing or wires against a solid surface.

Material Code: A - SAE 1008/1010 G90 Per ASTM A653/653M
 Galvanized Steel
 B - SAE 1008/1010 Low Carbon Steel
 Zinc Plate per ASTM B633 Fe/Zn 8 Type II

PART NUMBER CALL OUT

F413-008 A Half Clip Coated, Galv, 1/2" Dia, 5/16" Bolt
 A — Material Code
 F413 — Base Part Number

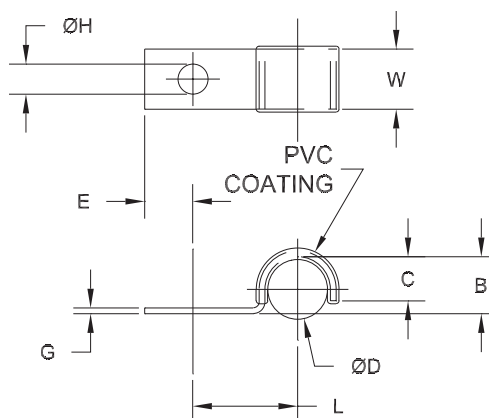


Base Part Number	D	H	L	W	E	B	G	C
	Clamping Diameter	Hole Diameter	Center to Center	Width	Hole Center to End	Gap	Material Thickness	Closure
	± .015	± .005	± .031	± .010	± .015	± .015	± .002	± .015
F411-003	0.187	0.218	0.437	0.500	0.250	0.188	0.032	0.156
F412-003	0.187	0.281	0.437	0.500	0.250	0.188	0.032	0.156
F411-004	0.250	0.218	0.500	0.500	0.250	0.250	0.048	0.188
F412-004	0.250	0.281	0.500	0.500	0.250	0.250	0.048	0.188
F413-004	0.250	0.343	0.500	0.625	0.250	0.250	0.048	0.188
F411-005	0.312	0.218	0.531	0.625	0.312	0.312	0.048	0.218
F412-005	0.312	0.281	0.531	0.625	0.312	0.312	0.048	0.218
F413-005	0.312	0.343	0.687	0.625	0.343	0.312	0.060	0.218
F414-005	0.312	0.406	0.687	0.750	0.343	0.312	0.060	0.218
F411-006	0.375	0.218	0.562	0.625	0.312	0.375	0.048	0.281
F412-006	0.375	0.281	0.562	0.625	0.312	0.375	0.048	0.281
F413-006	0.375	0.343	0.687	0.625	0.375	0.375	0.060	0.281
F414-006	0.375	0.406	0.687	0.750	0.375	0.375	0.060	0.281
F411-007	0.437	0.218	0.625	0.625	0.312	0.437	0.060	0.312
F412-007	0.437	0.281	0.625	0.625	0.312	0.437	0.060	0.312
F413-007	0.437	0.343	0.687	0.625	0.375	0.437	0.060	0.312
F414-007	0.437	0.406	0.687	0.750	0.375	0.437	0.060	0.312
F411-008	0.500	0.218	0.687	0.625	0.312	0.500	0.060	0.343
F412-008	0.500	0.281	0.687	0.625	0.312	0.500	0.060	0.343
F413-008	0.500	0.343	0.750	0.625	0.375	0.500	0.060	0.343
F414-008	0.500	0.406	0.750	0.750	0.375	0.500	0.060	0.343
F411-009	0.562	0.218	0.750	0.625	0.312	0.562	0.060	0.437
F412-009	0.562	0.281	0.750	0.625	0.312	0.562	0.060	0.437
F413-009	0.562	0.343	0.812	0.625	0.375	0.562	0.060	0.437
F414-009	0.562	0.406	0.812	0.750	0.375	0.562	0.060	0.437
F411-010	0.625	0.218	0.812	0.625	0.312	0.625	0.060	0.406
F412-010	0.625	0.281	0.812	0.625	0.312	0.625	0.060	0.406
F413-010	0.625	0.343	0.875	0.625	0.375	0.625	0.060	0.406
F414-010	0.625	0.406	0.875	0.750	0.375	0.625	0.060	0.406



CLIP SPECIFICATIONS

Diameter: 3/16" - 1"
Bolt Size: #10 - 3/8"
Coating: Black Vinyl Plastisol Coating Per SAE J200
 0.032" Thick ± .015"
Notes: Used to hold pipe, conduit, tubing or wires against a solid surface.
Material Code: A - SAE 1008/1010 G90 Per ASTM A653/653M Galvanized Steel
 B - SAE 1008/1010 Low Carbon Steel Zinc Plate per ASTM B633 Fe/Zn 8 Type II

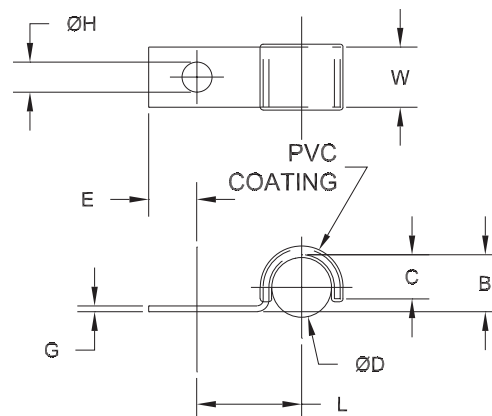

PART NUMBER CALL OUT

F413-008 A Half Clip Coated, Galv, 1/2" Dia, 5/16" Bolt
 A — Material Code
 F413 — Base Part Number

Base Part Number	D	H	L	W	E	B	G	C
	Clamping Diameter	Hole Diameter	Center to Center	Width	Hole Center to End	Gap	Material Thickness	Closure
	± .015	± .005	± .031	± .010	± .015	± .015	± .002	± .015
F411-011	0.687	0.218	0.812	0.625	0.312	0.687	0.060	0.437
F412-011	0.687	0.281	0.812	0.625	0.312	0.687	0.060	0.437
F413-011	0.687	0.343	0.875	0.625	0.375	0.687	0.060	0.437
F414-011	0.687	0.406	0.875	0.750	0.375	0.687	0.060	0.437
F411-012	0.750	0.218	0.875	0.625	0.312	0.750	0.060	0.468
F412-012	0.750	0.281	0.875	0.625	0.312	0.750	0.060	0.468
F413-012	0.750	0.343	0.937	0.625	0.375	0.750	0.060	0.468
F414-012	0.750	0.406	0.937	0.750	0.375	0.750	0.060	0.468
F412-013	0.812	0.281	0.937	0.750	0.375	0.812	0.060	0.531
F413-013	0.812	0.343	0.937	0.750	0.375	0.812	0.060	0.531
F414-013	0.812	0.406	0.937	0.750	0.375	0.812	0.060	0.531
F412-014	0.875	0.281	0.968	0.750	0.437	0.812	0.060	0.593
F413-014	0.875	0.343	0.968	0.750	0.437	0.812	0.060	0.593
F414-014	0.875	0.406	0.968	0.750	0.437	0.812	0.060	0.593
F412-015	0.937	0.281	1.000	0.750	0.437	0.937	0.060	0.625
F413-015	0.937	0.343	1.000	0.750	0.437	0.937	0.060	0.625
F414-015	0.937	0.406	1.000	0.750	0.437	0.937	0.060	0.625
F412-016	1.000	0.281	1.062	0.750	0.437	1.000	0.060	0.687
F413-016	1.000	0.343	1.062	0.750	0.437	1.000	0.060	0.687
F414-016	1.000	0.406	1.062	0.750	0.437	1.000	0.060	0.687

Warranty Disclaimer

The parts described herein are manufactured as set forth in the specifications listed for each part. Although we have taken reasonable efforts to include accurate and up to date information in this catalog, we make no warranty or representations as to its accuracy. We assume no liability or responsibility for any errors or omissions in the content of the catalog.

Every part listed in the catalog is provided to you "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

THIS DISCLAIMER OF LIABILITY APPLIES TO ANY DAMAGES OR INJURY CAUSED BY ANY FAILURE OF PERFORMANCE, ERROR, OMISSION, INTERRUPTION, DELETION, DELAY IN OPERATION OR TRANSMISSION, COMMUNICATION LINE FAILURE, THEFT OR DESTRUCTION OR UNAUTHORIZED ACCESS TO, ALTERATION OF, OR USE OF RECORD, WHETHER FOR BREACH OF CONTRACT, TORTIOUS BEHAVIOR, NEGLIGENCE, OR UNDER ANY OTHER CAUSE OF ACTION. YOU ALSO SPECIFICALLY ACKNOWLEDGE AND AGREE THAT WE ARE NOT LIABLE FOR THE DEFAMATORY, OFFENSIVE OR ILLEGAL CONDUCT OF OTHER PERSONS AND THAT THE RISK OF INJURY FROM THE FOREGOING RESTS ENTIRELY WITH YOU.



**FRANKLIN
FASTENER**
Est. 1953

12701 Beech Daly Road
Redford, MI 48239-2456
U.S.A.

Phone: (313) 537-8900
Fax: (313) 537-0286
www.franklinfastener.com

© 2009 Franklin Fastener, Inc.
All Rights Reserved.
Produced in U.S.A.